


## Fully Automatic Clutch Carbon Brush Electric Screwdriver



- The patented break switch design has high resistance to impulsive vibration that will increase the life of the switch
- Uses High-Power Rare-Earth Magnet Motor which has smaller size, provides higher torque output, and is safe due to double insulation
- The buffer device cooperates with the new clutch to reduce the impact force, improve the torque accuracy, and increase the service life
- The external carbon brush is easy to replace, easy to maintain and does not require professional repairs
- Built-in torque adjustment with anti-locking ring design can directly set the output torque, avoiding the accidental change of the torque by the on-site operator



TORQUE REFERENCE

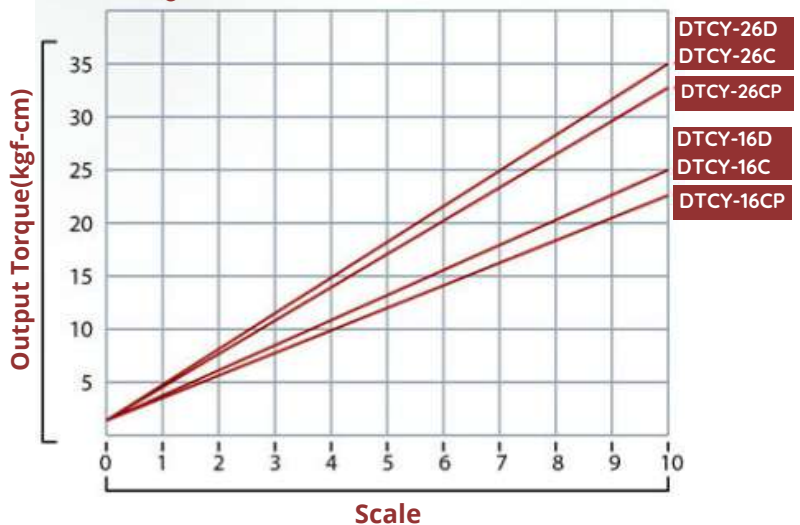

MODEL		DTCY-16D	DTCY-26D	DTCY-16C	DTCY-26C	DTCY-16CP	DTCY-26CP
FREE SPEED (rpm)		1000	660	1000	660	1000	660
OUTPUT TORQUE RANGE	N.m	0.2-2.5	0.2-3.5	0.2-2.5	0.2-3.5	0.2-2.3	0.2-2.3
	lbf.in	1.7-30.4	1.7-30.4	1.7-21.7	1.7-30.4	1.7-20.0	1.7-28.6
	kgf.cm	2.0-35.0	2.0-35.0	2.0-25.0	2.0-35.0	2.0-23.0	2.0-33.0
START CONTROLLER		LEVER START			PUSH START		
		G/H		A/B/C/D/E/F/H		C/F	
ESD		YES					